

Hide-a-Bevel HAND EDGER

Instruction Manual



OptiSource™

The Optical Supply Resource

40 Sawgrass Drive, Bellport, NY 11713

1-800-OptiSource (678-4768)

1-800-OptiSource.com



Fax: 631.924.8375

Instruction Manual

Dear Customer:

Thank you for purchasing our Hide-a-Bevel Hand Edger (32-HANDEDGER). To ensure safety and proper use, please read this manual carefully and follow the instructions herein.

Part Names:

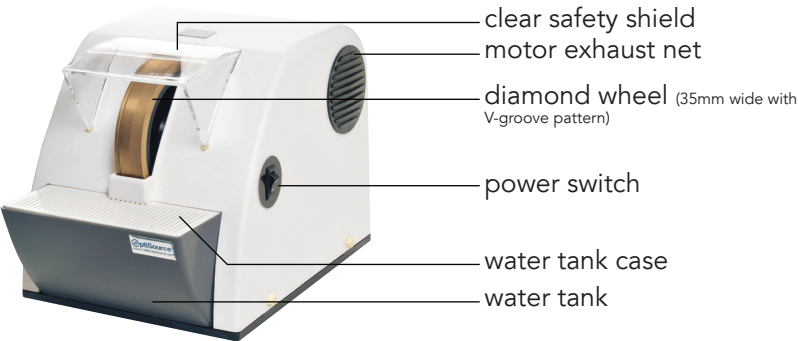


water tank yellow sponge


Specifications and Power Requirement:

Specifications	W x H x D	Net Weight
	12.25"W x 17.75"H x 13"D	33 pounds
	Power	
	100-120V/60HzAC or 200-240V/50HzAC 120W	


Instruction Manual

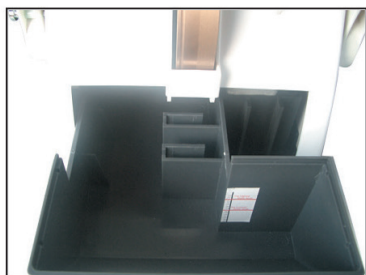

1. Remove the water tank case.

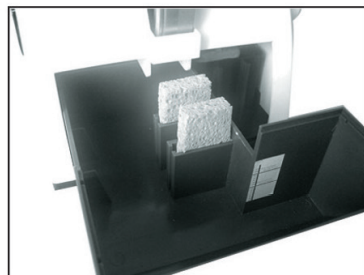

2. Insert the yellow sponge into the water tank slots.

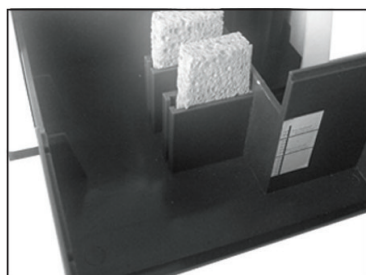

3. Add clean water up to highest level.



4. Plug it in, turn it on, ready to use.

*To cut polycarbonate, remove the water reservoir and sponge.

Safety Precautions:

- Always check the water level. Keep yellow sponge moist.
- Always use the correct power supply
- Don't use the machine for any other purposes other than hand-grinding lens edges.



1-800-OptiSource (678-4768) | 1-800-OptiSource.com